




EJ INSULATION JACKETING MATERIALS
PTFE/FIBERGLASS COMPOSITES
ENGINEERED FOR REMOVABLE INSULATION SERVICE

200 Bouchard Street Manchester, NH 03103 PHONE (603) 296-2221 FAX (603)296-2248 www.textilecoated.com

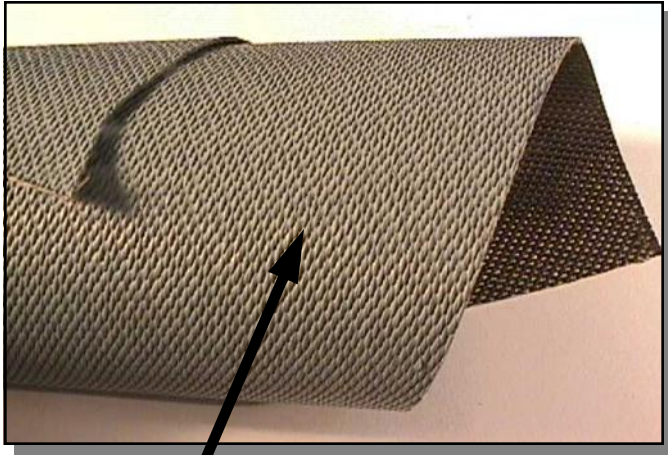

EJ 3400 Description: This PTFE/fiberglass composite is designed for use in heavy weight insulation jacketing applications. The standard material has a pigmented PTFE coating on one side and an unpigmented PTFE coating on the other side.

- ⇒ **Successfully used in insulation jacketing service since 1985.**
- ⇒ **Special coating technology for industrial fabrication.**
- ⇒ **Severe chemical and temperature exposure capabilities.**
- ⇒ **Variations engineered upon request.**
- ⇒ **Easily sewn.**
- ⇒ **Flame retardant.**



Product Close-up



Many Colors Available

EJ 3400 Properties:

Upper Use Temperature: 600°F (316°C) Continuous Service

Weight: 34.0 oz/yd² (1153 g/m²)

Thickness: 0.034" (0.86 mm)

Width: 60" (1524 mm) Nominal

Tensile Strength (Warp): 605 lbs/in (5406 N/50 mm)

Tensile Strength (Fill): 520 lbs/in (4647 N/50 mm)

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.