




INSULATION JACKETING MATERIALS

LAMINATED PTFE/TEXTILE COMPOSITES
ENGINEERED FOR CORROSIVE REMOVABLE
INSULATION SERVICE

200 Bouchard Street Manchester, NH 03103 PHONE (603) 296-2221 FAX (603)296-2248 www.textilecoated.com

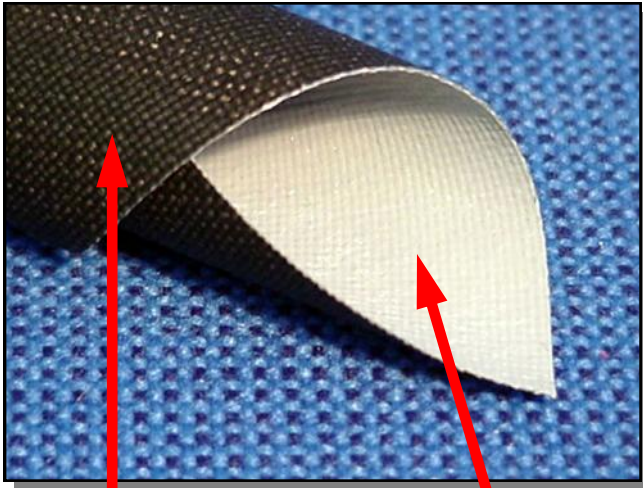

PTFE Impregnated
Fiberglass

0.003" PTFE Film

FILMJAC™ 1900 Description: This PTFE/ fiberglass composite is designed for harsh, wet insulation jacketing applications. A PTFE film is laminated to one side of the composite for enhanced chemical protection.

- ⇒ Successfully used in insulation jacketing services since 1988.
- ⇒ Special coating and film technology for industrial fabrication.
- ⇒ Severe chemical and temperature exposure capabilities.
- ⇒ Many colors are available.
- ⇒ Variations engineered upon request.

FILMJAC™ 1900 Properties:

Upper Use Temperature: 600°F (316°C) Continuous Service

Weight: 19 oz/yd² (644 g/m²)

Thickness: 0.015" (0.38 mm)

Width: 58" (1473 mm) Normal

Tensile Strength (Warp): 275 lbs/in (2457 N/50 mm)

Tensile Strength (Fill): 225 lbs/in (2011 N/50 mm)

FILMJAC™ is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. **TCI** makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.