





FLEX TEST for CORROSION BARRIERS

Flex Cycles to Failure for Thin Perfluoroplastic Products

In accordance with International Standard ISO 7854-1984 (E);
*Rubber-or plastics-coated fabrics — Determination of resistance to damage
by flexing (dynamic method).*

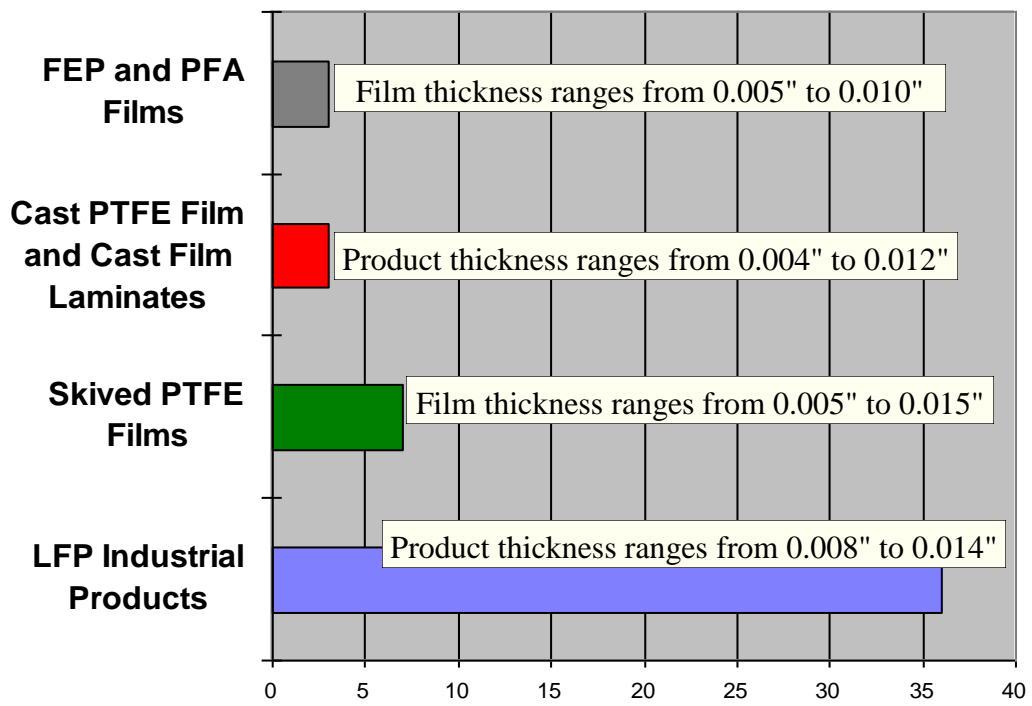

Hours to Failure in Flex Tester (30,600 cycles/hour)

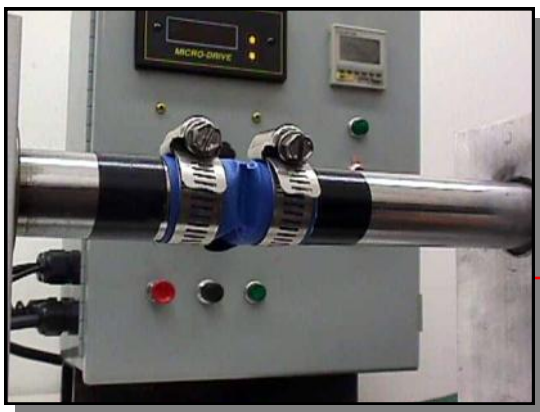

(Please note; A blue pigmented specimen was used in this photo for visual clarity)

www.textilecoated.com