




## TANK SEALING MATERIALS


PTFE/FIBERGLASS COMPOSITES ENGINEERED  
FOR TANK SEALING SERVICE

200 Bouchard Street Manchester, NH 03103 PHONE (603) 296-2221 FAX (603) 296-2248 [www.textilecoated.com](http://www.textilecoated.com)

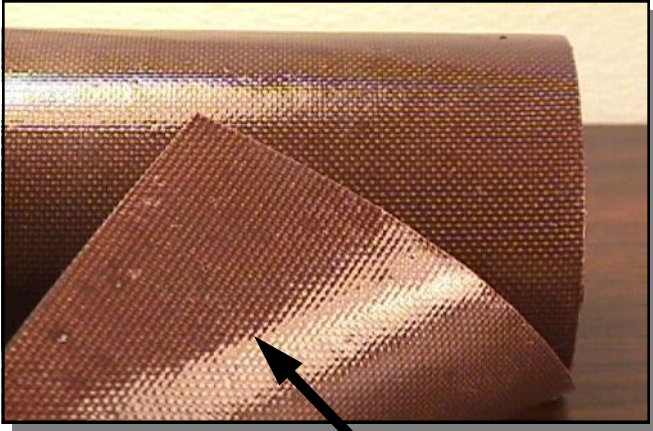

***FLUOROTEX™ 100*** Description:  
This Perfluoroplastic/fiberglass composite is engineered for sealing applications in above ground storage

- **Successfully used in tank sealing service since 1987.**
- **Easily heat-sealed in field service.**
- **Severe chemical and temperature exposure capabilities.**
- **Variations in color, conductivity and coating engineered upon request.**

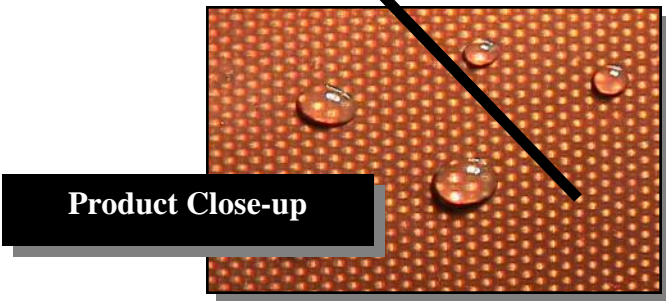

Product Close-up

## ***FLUOROTEX™ 100***

***Upper Use Temperature:*** 600°F (316°C) Continuous Service

***Weight:*** 13 oz/yd<sup>2</sup> (441 g/m<sup>2</sup>)

***Thickness:*** 0.009" (0.23 mm)

***Width:*** 38" (965 mm) Typical

***Tensile Strength (Warp):*** 250 lbs/in (2234 N/50 mm)

***Tensile Strength (Fill):*** 200 lbs/in (1787 N/50 mm)

***FLUOROTEX™*** is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. **TCI** makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.