



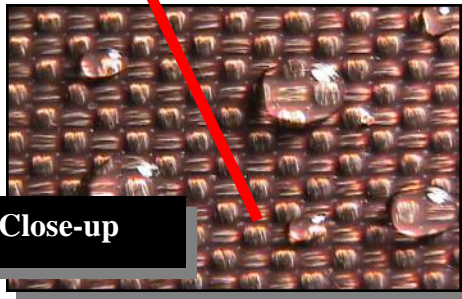

TANK SEALING MATERIALS

PTFE/FIBERGLASS COMPOSITES ENGINEERED
FOR TANK SEALING SERVICE

200 Bouchard Street Manchester, NH 03103 PHONE (603) 296-2221 FAX (603) 296-2248 www.textilescoated.com

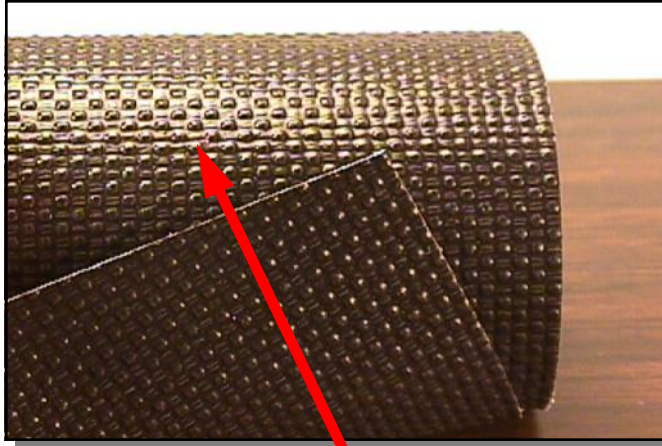

Product Close-up

***FLUOROTEX™ 700* Description:**
This Perfluoroplastic/fiberglass composite is engineered for sealing applications in above ground storage

- **Successfully used in tank sealing service since 1987.**
- **Easily heat-sealed in field service.**
- **Severe chemical and temperature exposure capabilities.**
- **Variations in color, conductivity and coating engineered upon request.**

***FLUOROTEX™ 700* Properties:**

Upper Use Temperature: 600°F (316°C) Continuous Service

Weight: 34 oz/yd² (1153 g/m²)

Thickness: 0.030" (0.76 mm)

Width: 60" (1524 mm) Typical

Tensile Strength (Warp): 700 lbs/in (6256 N/50 mm)

Tensile Strength (Fill): 700 lbs/in (6256 N/50 mm)

FLUOROTEX™ is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. **TCI** makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.