




**LFP™ 2105
CrossFilm™**

A PTFE barrier material
for non-metallic expansion joint service

PO Box 5160 Manchester, NH 03108 PHONE (603) 296-2221 FAX (603) 296-2248 www.textilescoated.com

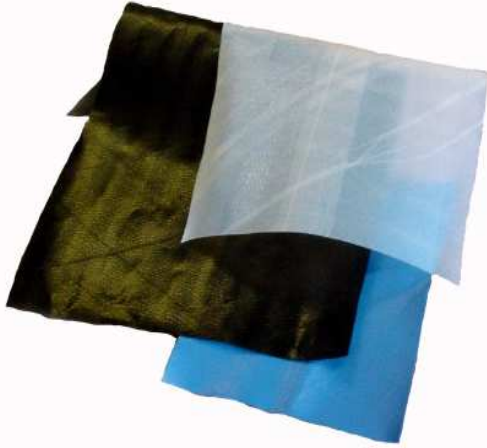

LFP™ 2105 CrossFilm™ Expansion Joint Product:

LFP™ 2105 CrossFilm™ is an exceptionally thin, high strength, PTFE laminate that has been targeted for challenging thermo/chemical applications, such as the *gas seal requirement in flue duct expansion joints*.


LFP™ 2105 CrossFilm™ possesses many of the same attributes found in TCI's highly successful LFP™ CrossFilm™ product series. LFP™ 2105 CrossFilm™ consists solely of PTFE, which means the material is, essentially, chemically inert. The product can operate in temperatures as high as 500°F. The nonporous membrane can be readily fabricated using a variety of heat sealing techniques. LFP™ 2105 CrossFilm™ is available in a variety of colors and in a conductive or nonconductive construction.



Thin Film Flex Tester

Trapezoidal
Tear Strength
(lbs)

LFP™ CrossFilm™
Tear Strength vs. Thickness

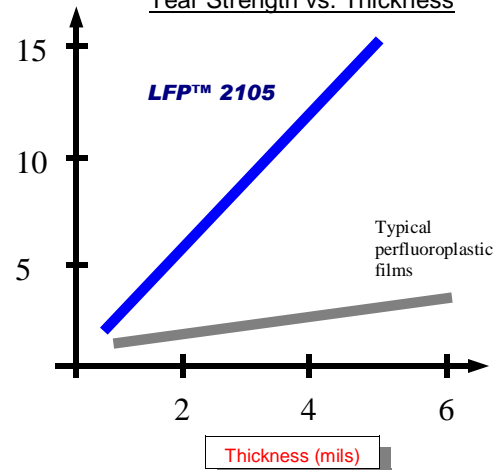

LFP™ 2105 CrossFilm™: 750,000 cycles

LFP™ 2105 CrossFilm™ Properties:

- Upper Use Temperature:** 600°F (316°C) continuous service
- Weight:** 8.0 oz/yd² (272 g/m²)
- Thickness:** 0.005" (0.13 mm)
- Width:** 60" (1524 mm); *special widths available*
- Tensile Strength:** 23 lbs/in (205.5 N/50 mm)
- Tear Strength:** 18 lbs (80.1 N)

LFP is a trademark of TEXTILES COATED INTERNATIONAL.
CrossFilm is a trademark of TEXTILES COATED INTERNATIONAL.
Patents worldwide

This information is supplied in good faith is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.