




LFP™ CrossFilm™
Flex Test

PO Box 5160 Manchester, NH 03108 PHONE (603) 296-2221 FAX (603) 296-2248 www.textilecoated.com

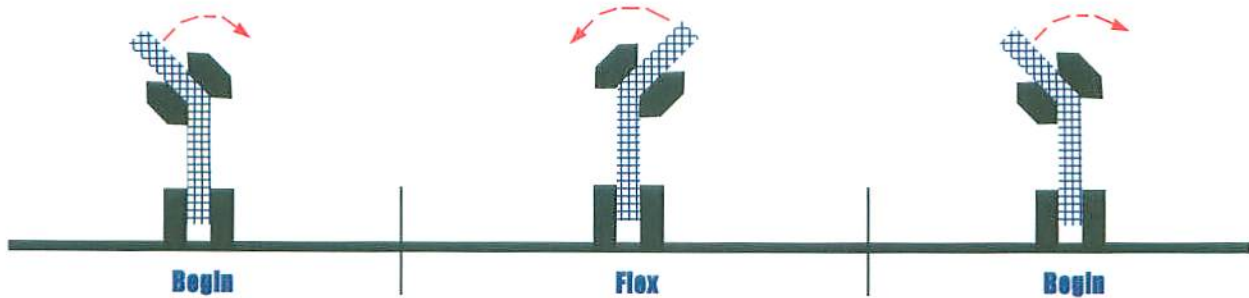

LFP™2160 CrossFilm™ vs Perfluoroplastic Films

PRODUCT	PRODUCT (lbs/in)	THICKNESS (in)	CYCLES-TO-FAILURE
FEP	25	0.061	3,527
PFA	25	0.061	2,980
PTFE Skived	25	0.061	576,000
<i>LFP™2160</i>	25	0.061	4,500,000

LFP™2160 CrossFilm™ vs PTFE/Fiberglass Composite

PRODUCT	with LOAD (lbs/in)	CYCLES-TO-FAILURE
PTFE/FIBERGLASS COMPOSITE	20.0	185,000
<i>LFP™2160</i>	20.0	3,200,000

* LFP is a trademark of TEXTILES COATED INTERNATIONAL.

Patents worldwide

This information is supplied in good faith is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.