




**LFP™ CrossFilm™**  
**Flex Test**

200 Bouchard Street Manchester, NH 03103 PHONE: (603) 296-2221 FAX: (603) 296-2248 [www.textilecoated.com](http://www.textilecoated.com)

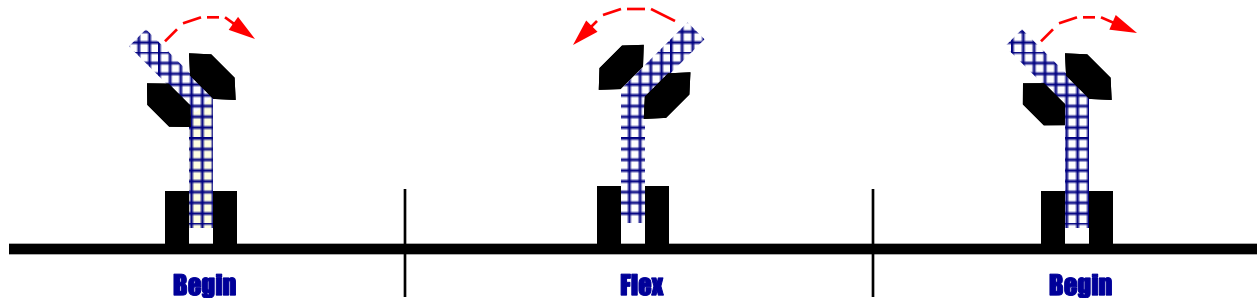

**LFP™ 2160 CrossFilm™ vs Perfluoroplastic Films**

PRODUCT	PRODUCT (lbs/in)	THICKNESS (in)	CYCLES-TO-FAILURE
FEP	25	0.061	3,527
PFA	25	0.061	2,980
PTFE Skived	25	0.061	576,000
<i>LFP™ 2160 CrossFilm™</i>	25	0.061	<b>4,500,000</b>

**LFP™ 2160 CrossFilm™ vs PTFE/Fiberglass Composite**

PRODUCT	with LOAD (lbs/in)	CYCLES-TO-FAILURE
PTFE/FIBERGLASS COMPOSITE	20.0	185,000
<i>LFP™ 2160 CrossFilm™</i>	20.0	<b>3,200,000</b>

*LFP™ CrossFilm™* is a trademark of TEXTILES COATED INTERNATIONAL.

Patents worldwide

This information is supplied in good faith is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.