




INSULATION JACKETING MATERIALS

**SILICONE/FIBERGLASS COMPOSITES
ENGINEERED FOR REMOVABLE INSULATION SERVICE**

200 Bouchard Street Manchester, NH 03103 PHONE (603) 296-2221 FAX (603)296-2248 www.textilecoated.com

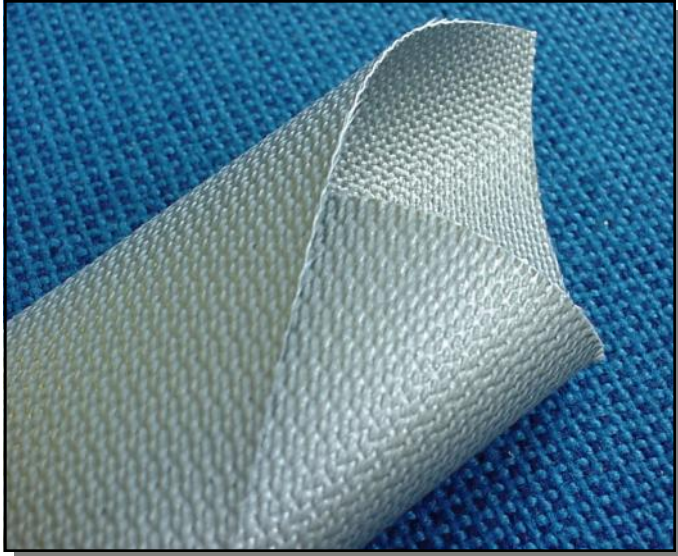

***SILVERJAC™ 1700* Description:** This Silicone/fiberglass composite with proven flexible coating technology is engineered for standard duty insulation jacketing applications.

- ⇒ **Successfully used in insulation jacketing applications since 1985.**
- ⇒ **Incorporates proven *SILVERJAC™* coating technology.**
- ⇒ **Severe temperature and chemical exposure capability.**
- ⇒ **Flame retardant.**
- ⇒ **Easily sewn.**
- ⇒ **Variations engineered upon request.**

***SILVERJAC™ 1700* Properties:**

Upper Use Temperature: 480°F (249°C) Continuous Service.

Weight: 17 oz/yd² (577 g/m²)

Thickness: 0.017" (0.43 mm)

Width: 60" (1524 mm) Nominal

Tensile Strength (Warp): 350 lbs/in (3128 N/50 mm)

Tensile Strength (Fill): 300 lbs/in (2681 N/50 mm)

SILVERJAC™ is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.