




## INSULATION JACKETING MATERIALS

**SILICONE/FIBERGLASS COMPOSITES  
ENGINEERED FOR REMOVABLE INSULATION SERVICE**

200 Bouchard Street Manchester, NH 03103 PHONE (603) 296-2221 FAX (603)296-2248 [www.textilecoated.com](http://www.textilecoated.com)

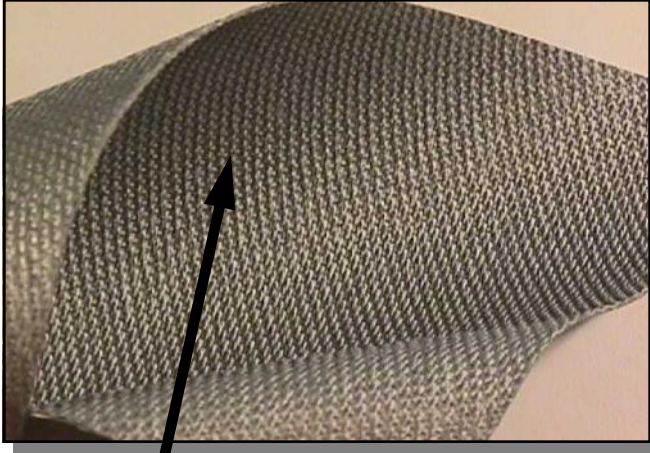

***SILVERJAC™ 3200* Description:** This Silicone/fiberglass composite with proven, flexible coating technology is engineered for standard heavy duty insulation jacketing service.



Product Close-up

- ⇒ Successfully used in insulation jacketing applications since 1985.
- ⇒ Incorporates proven ***SILVERJAC™*** coating technology.
- ⇒ Severe temperature and chemical exposure capability.
- ⇒ Flame retardant.
- ⇒ Easily sewn.
- ⇒ Variations engineered upon request.

### ***SILVERJAC™ 3200* Properties:**

***Upper Use Temperature:*** 480°F (249°C) Continuous Service.

***Weight:*** 34 oz/yd<sup>2</sup> (1153 g/m<sup>2</sup>)

***Thickness:*** 0.030" (0.76 mm)

***Width:*** 60" (1524 mm) Nominal

***Tensile Strength (Warp):*** 610 lbs/in (5451 N/50 mm)

***Tensile Strength (Fill):*** 512 lbs/in (4575 N/50 mm)

***SILVERJAC™*** is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.