




INSULATION JACKETING MATERIALS
LAMINATED PTFE/TEXTILE COMPOSITES ENGINEERED FOR CORROSIVE REMOVABLE INSULATION SERVICE

200 Bouchard Street Manchester, NH 03103 PHONE (603) 296-2221 FAX (603)296-2248 www.textilescoated.com

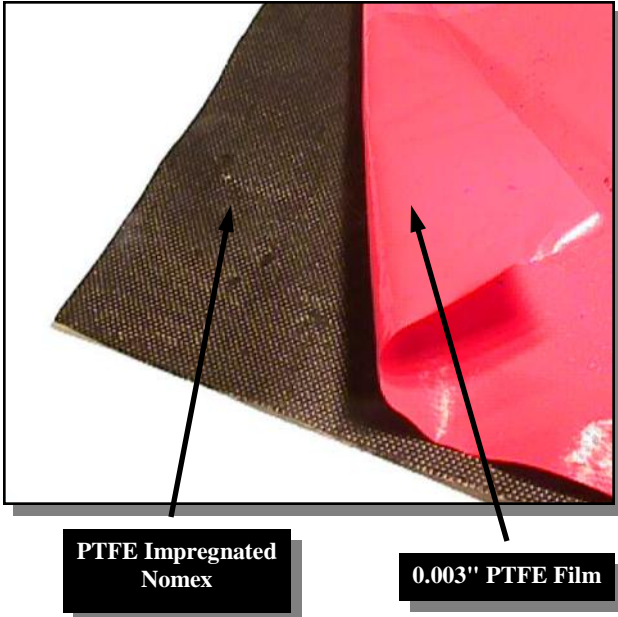

*(Film is red in this photo to show contrast)

STF™ 20 Description: This PTFE/Nomex composite is designed for insulation jacketing applications that require the durability of a Nomex fabric in wet environments. A PTFE film is laminated to one side for enhanced chemical protection.

- ⇒ Successfully used in insulation jacketing service since 1988.
- ⇒ Special coating and film technology for industrial fabrication.
- ⇒ Severe chemical and temperature exposure capabilities.
- ⇒ Many colors are available.
- ⇒ Variations engineered upon request.

⇒ **Nomex reinforcement has more capability than fiberglass in wet environments.**

STF™ 20 Properties:

Upper Use Temperature: 500°F (260°C) Continuous Service

Weight: 20 oz/yd² (678 g/m²)

Thickness: 0.019" (0.48 mm)

Width: 54" (1372 mm) Typical

Tensile Strength (Warp): 180 lbs/in (1609 N/50 mm)

Tensile Strength (Fill): 150 lbs/in (1341 N/50 mm)

STF™ is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. **TCI** makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.