




THERMALAM 100/1406 Description:

This product is a high temperature expansion joint material designed for applications requiring a rugged woven insulation component with an upper use continuous operating temperature of 850°F (454°C). A 3/8", woven fiberglass is laminated to **TEXFILM 1406**. The laminated insulation component acquires strength and resiliency from the load bearing perfluoroplastic composite. The added integrity extends the life of the insulation and helps to prevent "hot spots" from forming on the belt. Installation also becomes easier with a laminated insulation component. This product can be fabricated into numerous expansion joint shapes and sizes.

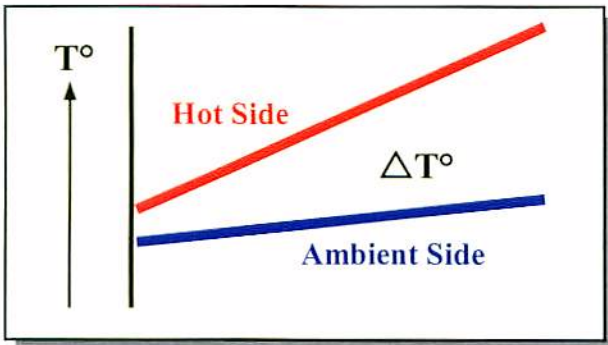

*This plot shows the capability of **THERMALAM 100/1406** resting on a hot plate in an ambient temperature environment.*



THERMALAM 100/1406 Properties:

<i>Upper Use Temperature:</i>	850°F (454°C) Continuous Service
<i>Chemical Resistance:</i>	Excellent
<i>Weight:</i>	155 oz/yd ² (5270 g/m ²)
<i>Thickness:</i>	0.345" (8.76 mm)
<i>Width:</i>	60" (1524 mm); Special widths available
<i>Tensile Strength (Warp):</i>	1200 lbs/in (10724 N/50mm)
<i>Tensile Strength (Fill):</i>	1200 lbs/in (10724 N/50mm)

THERMALAM and **TEXFILM** are trademarks of **TEXTILES COATED INCORPORATED**.

Patented.

This information is supplied in good faith and is based on information currently available. **TCI** makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.