




TANK SEALING MATERIALS

LAMINATED PTFE MATERIALS ENGINEERED
FOR TANK SEALING SERVICE

PO Box 5160 Manchester, NH 03108 PHONE (603) 296-2221 FAX (603) 296-2248 www.textilecoated.com

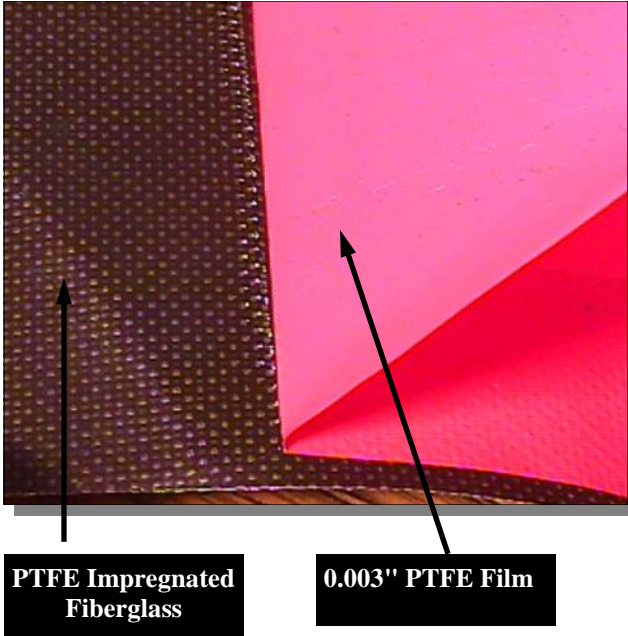

TS 303 Description: This PTFE/fiberglass composite is engineered for wet or dry service in above ground storage tanks. A film is laminated to one side of the composite for enhanced protection in wet environments.

- **Successfully used in tank sealing service since 1987.**
- **Severe chemical and temperature exposure capabilities.**
- **Color, conductivity and width variations engineered upon request.**
- **Easily heat-sealed in field service.**

*(Film is red in this photo to show contrast)

TS 303 Properties:

<i>Upper use temperature:</i>	600°F continuous (316°C)
<i>Weight:</i>	22 oz/yd ² (746 g/m ²)
<i>Thickness:</i>	0.017" (0.43 mm)
<i>Width:</i>	60" (1524 mm) Typical; Cut-To-Size Widths Available Upon Request
<i>Tensile strength (Warp):</i>	325 lbs/in (2905 N/50 mm)
<i>Tensile strength (Fill):</i>	275 lbs/in (2458 N/50 mm)

This information is supplied in good faith and is based on information currently available. **TCI** makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.