




## INSULATION JACKETING MATERIALS

**SILICONE/FIBERGLASS COMPOSITES  
ENGINEERED FOR REMOVABLE INSULATION SERVICE**

200 Bouchard Street Manchester, NH 03103 PHONE (603) 296-2221 FAX (603)296-2248 [www.textilecoated.com](http://www.textilecoated.com)

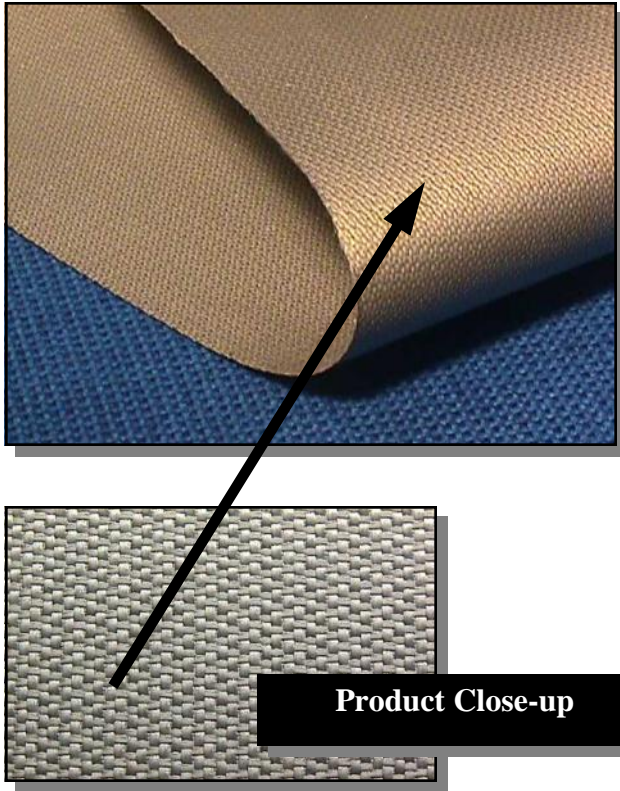

**TUFJAC™ 1550 Description: This Silicone/ fiberglass composite has a rugged coating technology that is engineered for removable pads, flanges and valve covers.**

- ⇒ **Successfully used in insulation jacketing applications since 1985.**
- ⇒ **Incorporates rugged TUFJAC™ coating technology.**
- ⇒ **Severe temperature and chemical exposure capability.**
- ⇒ **Flame retardant.**
- ⇒ **Easily sewn.**
- ⇒ **Variations engineered upon request.**

### **TUFJAC™ 1550 Properties:**

|  |   |
|--|---|
| <b><i>Upper Use Temperature:</i></b>   | 480°F (249°C) Continuous Service.               |
| <b><i>Weight:</i></b>                  | 15.5 oz/yd <sup>2</sup> (526 g/m <sup>2</sup> ) |
| <b><i>Thickness:</i></b>               | 0.016" (0.41 mm)                                |
| <b><i>Width:</i></b>                   | 60" (1524 mm) Nominal                           |
| <b><i>Tensile Strength (Warp):</i></b> | 370 lbs/in (3307 N/50 mm)                       |
| <b><i>Tensile Strength (Fill):</i></b> | 310 lbs/in (2770 N/50 mm)                       |

**TUFJAC™** is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.