




INSULATION JACKETING MATERIALS

**SILICONE/FIBERGLASS COMPOSITES
ENGINEERED FOR REMOVABLE INSULATION SERVICE**

200 Bouchard Street Manchester, NH 03103 PHONE (603) 296-2221 FAX (603)296-2248 www.textilecoated.com

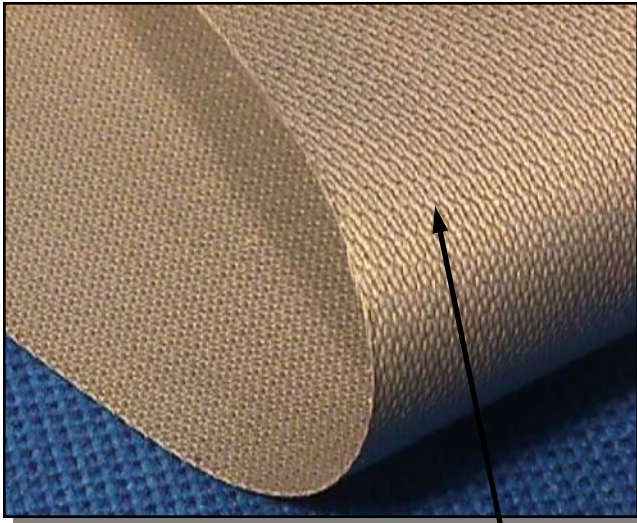

Product Close-up

TUFJAC™ 1725 Description: This Silicone/fiberglass composite has a rugged coating technology that is engineered for removable pads, flanges and valve covers.

- ⇒ **Successfully used in insulation jacketing applications since 1985.**
- ⇒ **Incorporates rugged TUFJAC™ coating technology.**
- ⇒ **Severe temperature and chemical exposure capability.**
- ⇒ **Flame retardant.**
- ⇒ **Easily sewn.**
- ⇒ **Variations engineered upon request.**

TUFJAC™ 1725 Properties:

<i>Upper Use Temperature:</i>	480°F (249°C) Continuous Service.
<i>Weight:</i>	17 oz/yd ² (577 g/m ²)
<i>Thickness:</i>	0.017" (0.43 mm)
<i>Width:</i>	60" (1524 mm) Nominal
<i>Tensile Strength (Warp):</i>	370 lbs/in (3307 N/50 mm)
<i>Tensile Strength (Fill):</i>	310 lbs/in (2770 N/50 mm)

TUFJAC™ is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.