




**EXPANSION JOINT MATERIALS**  
**PTFE/FIBERGLASS COMPOSITES**  
**ENGINEERED FOR DRY GAS SERVICE**

200 Bouchard Street Manchester, NH 03109 PHONE: (603) 296-2221 FAX: (603) 296-2248 [www.textilecoated.com](http://www.textilecoated.com)

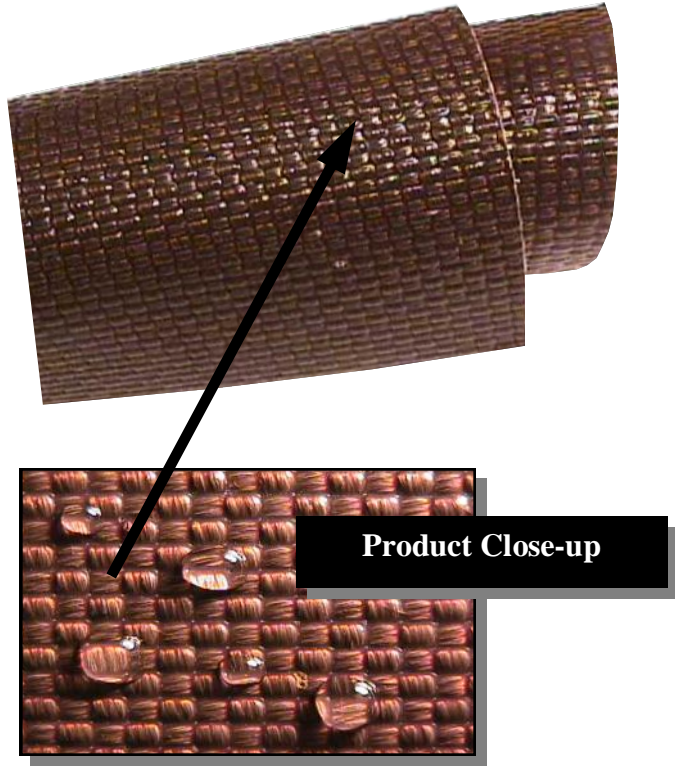

**TEXCOAT™ 1400 Description:** This PTFE/ fiberglass composite is designed for flexible expansion joint applications.

- ⇒ **Successfully used in expansion joint service since 1985.**
- ⇒ **Incorporates proven *TEXCOAT™* coating technology for industrial fabrication.**
- ⇒ **Severe chemical and temperature exposure capabilities.**
- ⇒ **Variations engineered upon request.**



**Many Colors Available**

**TEXCOAT™ 1400 Properties:**

- Upper Use Temperature:** 600°F (316°C) Continuous Service
- Weight:** 48 oz/yd<sup>2</sup> (1628 g/m<sup>2</sup>)
- Thickness:** 0.040" (1.00 mm)
- Width:** 60" (1524 mm) Normal; Cut-to-Size widths available.
- Tensile Strength (Warp):** 1200 lbs/in (10724 N/50 mm)
- Tensile Strength (Fill):** 1200 lbs/in (10724 N/50 mm)

**TEXCOAT™** is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.