




EXPANSION JOINT MATERIALS


PTFE/FIBERGLASS COMPOSITES ENGINEERED FOR DRY GAS SERVICE

200 Bouchard Street Manchester, NH 03103 PHONE: (603) 296-2221 FAX: (603) 296-2248 www.textilecoated.com

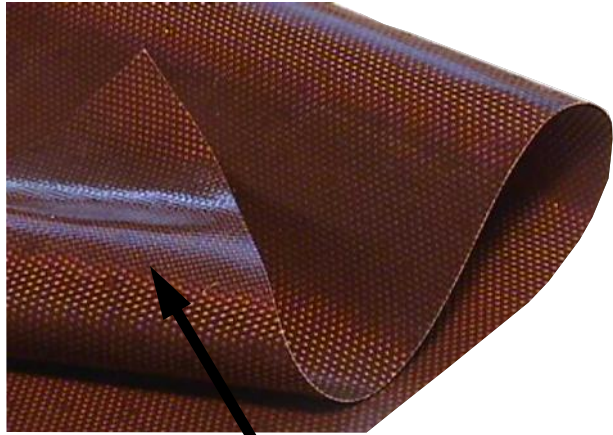

TEXCOAT™ 300 Description: This PTFE/ fiberglass composite is designed for flexible expansion joint applications.

- ⇒ **Successfully used in expansion joint service since 1985.**
- ⇒ **Incorporates proven *TEXCOAT™* coating technology for industrial fabrication.**
- ⇒ **Severe chemical and temperature exposure capabilities.**
- ⇒ **Variations engineered upon request.**

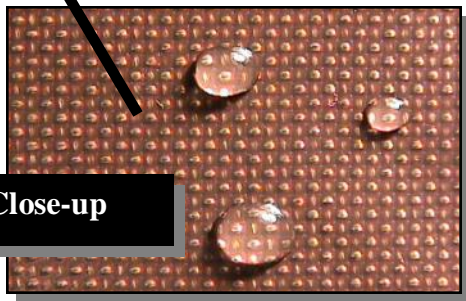

Product Close-up



Many Colors Available

TEXCOAT™ 300 Properties:

Upper Use Temperature:	600°F (316°C) Continuous Service
Weight:	19 oz/yd ² (644 g/m ²)
Thickness:	0.014" (0.36 mm)
Width:	60" (1524 mm) Normal; Cut-to-Size widths available.
Tensile Strength (Warp):	325 lbs/in (2904 N/50 mm)
Tensile Strength (Fill):	275 lbs/in (2457 N/50 mm)

TEXCOAT™ is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.