




## EXPANSION JOINT MATERIALS

### PTFE/FIBERGLASS COMPOSITES ENGINEERED FOR DRY GAS SERVICE

200 Bouchard Street Manchester, NH 03103 PHONE: (603) 296-2221 FAX: (603) 296-2248 [www.textilecoated.com](http://www.textilecoated.com)

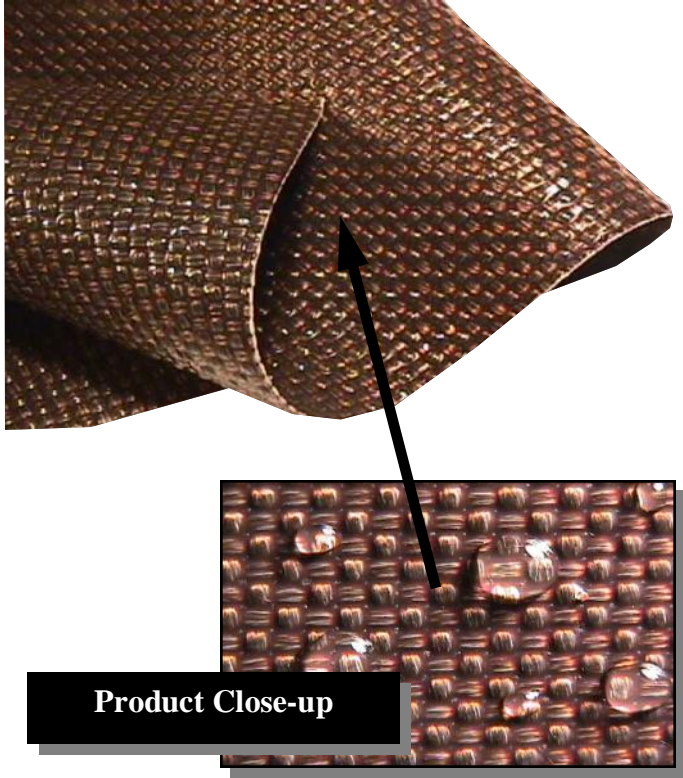

Product Close-up

**TEXCOAT™ 700 Description:** This PTFE/ fiberglass composite is designed for flexible expansion joint applications.

- ⇒ **Successfully used in expansion joint service since 1985.**
- ⇒ **Incorporates proven *TEXCOAT™* coating technology for industrial fabrication.**
- ⇒ **Severe chemical and temperature exposure capabilities.**
- ⇒ **Variations engineered upon request.**



Many  
Colors  
Available

### TEXCOAT™ 700 Properties:

<b>Upper Use Temperature:</b>	600°F (316°C) Continuous Service
<b>Weight:</b>	34 oz/yd <sup>2</sup> (1153 g/m <sup>2</sup> )
<b>Thickness:</b>	0.030" (0.76 mm)
<b>Width:</b>	60" (1524 mm) Normal; Cut-to-Size widths available.
<b>Tensile Strength (Warp):</b>	700 lbs/in (6255 N/50 mm)
<b>Tensile Strength (Fill):</b>	700 lbs/in (6255 N/50 mm)

**TEXCOAT™** is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.