



TEXTFILM™ EXPANSION JOINT MATERIALS


**LAMINATED PTFE/FIBERGLASS COMPOSITES
ENGINEERED FOR DRY GAS SEAL SERVICE**

200 Bouchard Street Manchester, NH 03103 PHONE: (603) 296-2221 FAX: (603) 296-2248 www.textilecoated.com



TEXTFILM 1404 Description: **TEXTFILM 1404** is engineered for dry, gas seal service. A 0.004" (0.1 mm) PTFE film is laminated to the **TEXCOAT 1400** product.

- ⇒ **Successfully used in expansion joint service since 1990.**
- ⇒ **Proven coating and lamination technology for industrial fabrication.**
- ⇒ **Severe chemical and temperature exposure capabilities.**
- ⇒ **Variations engineered upon request.**

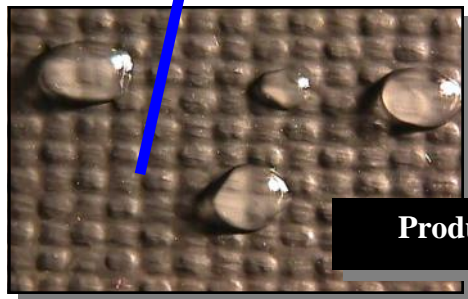

Product Close-up



Many Colors Available

TEXTFILM 1404 Properties:

Upper Use Temperature: 600°F (316°C) Continuous Service

Weight: 52 oz/yd² (1763 g/m²)

Thickness: 0.044" (1.12 mm)

Width: 58" (1473 mm) Nominal

Tensile Strength (Warp): 1200 lbs/in (10724 N/50 mm)

Tensile Strength (Fill): 1200 lbs/in (10724 N/50 mm)

TEXTFILM is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.