




TEXTFILM™ EXPANSION JOINT MATERIALS

**LAMINATED PTFE/FIBERGLASS COMPOSITES
ENGINEERED FOR DRY GAS SEAL SERVICE**

200 Bouchard Street Manchester, NH 03103 PHONE: (603) 296-2221 FAX: (603) 296-2248 www.textilecoated.com

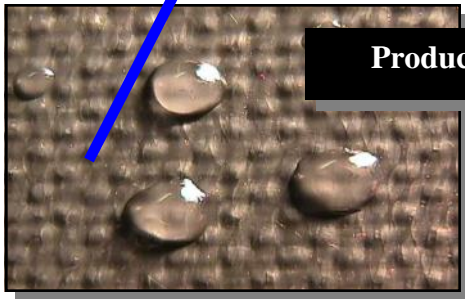

Product Close-up

TEXTFILM™ 304 Description: **TEXTFILM™ 304** is engineered for dry, gas seal service. A 0.004" (0.1 mm) PTFE film is laminated to the **TEXCOAT™ 300** product.

- ⇒ **Successfully used in expansion joint service since 1990.**
- ⇒ **Proven coating and lamination technology for industrial fabrication.**
- ⇒ **Severe chemical and temperature exposure capabilities.**
- ⇒ **Variations engineered upon request.**



Many Colors Available

TEXTFILM™ 304 Properties:

Upper Use Temperature:	600°F (315°C) Continuous Service
Weight:	19 oz/yd ² (645 g/m ²)
Thickness:	0.016" (0.40 mm)
Width:	58" (1473 mm) Nominal
Tensile Strength (Warp):	300 lbs/in (2670 N/50 mm)
Tensile Strength (Fill):	250 lbs/in (2225 N/50 mm)

TEXTFILM™ is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. **TCI** makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.