


**TEXTFILM™ EXPANSION JOINT MATERIALS**

**LAMINATED PTFE/FIBERGLASS COMPOSITES  
ENGINEERED FOR DRY FLUE GAS SEAL SERVICE**

200 Bouchard Street Manchester, NH 03103 PHONE: (603) 296-2221 FAX: (603) 296-2248 [www.textilecoated.com](http://www.textilecoated.com)

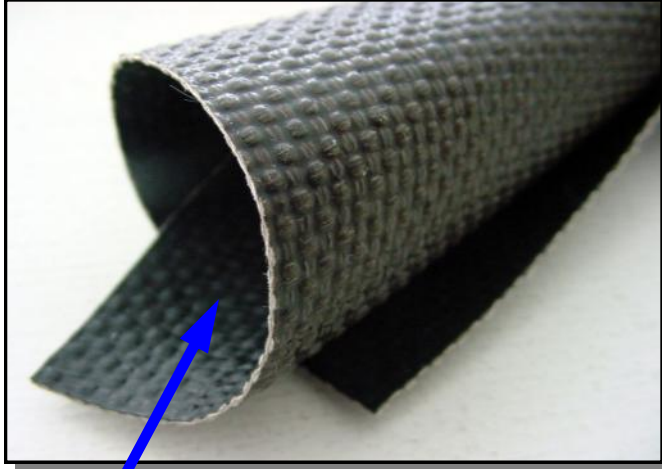

**TEXTFILM™ 705 Description:** TEXTFILM™ 705 is engineered for dry flue gas service. A 0.005" (0.13 mm) PTFE barrier is laminated to a PTFE/fiberglass composite to produce a rugged material for non-metallic compensator applications.



**Product Close-up**

- ⇒ **ZERO POROSITY.**
- ⇒ **Proven coating and lamination technology for industrial fabrication.**
- ⇒ **Severe chemical and temperature exposure capabilities.**
- ⇒ **Variations engineered upon request.**



**Many Colors Available**

**TEXTFILM™ 705 Properties:**

<b>Upper Use Temperature:</b>	600°F (315°C) Continuous Service
<b>Weight:</b>	39 oz/yd <sup>2</sup> (1326 g/m <sup>2</sup> )
<b>Thickness:</b>	0.035" (0.90 mm)
<b>Width:</b>	58" (1473 mm) Nominal
<b>Tensile Strength (Warp):</b>	700 lbs/in (6256 N/50 mm)
<b>Tensile Strength (Fill):</b>	700 lbs/in (6256 N/50 mm)

**TEXTFILM™** is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.