




TEXFILM 705 Description: **TEXFILM 705** is engineered for dry flue gas service. A 0.005" (0.13 mm) PTFE barrier is laminated to a PTFE/fiberglass composite to produce a rugged material for non-metallic compensator applications.

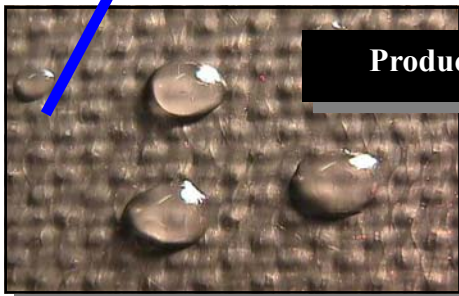

Product Close-up

- ⇒ **ZERO POROSITY.**
- ⇒ **Proven coating and lamination technology for industrial fabrication.**
- ⇒ **Severe chemical and temperature exposure capabilities.**
- ⇒ **Variations engineered upon request.**



**Many
Colors
Available**

TEXFILM 705 Properties:

Upper Use Temperature: 600°F (315°C) Continuous Service

Weight: 39 oz/yd² (1326 g/m²)

Thickness: 0.035" (0.90 mm)

Width: 58" (1473 mm) Nominal

Tensile Strength (Warp): 700 lbs/in (6256 N/50 mm)

Tensile Strength (Fill): 700 lbs/in (6256 N/50 mm)

TEXTFILM is a trademark of **TEXTILES COATED INCORPORATED.**

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.