




# High Temperature Expansion Joint Material Technology

200 Bouchard Street Manchester, NH 03103 PHONE: (603) 296-2221 FAX: (603) 296-2248 www.textilecoated.com

## Advantages of the **THERMALAM™** Technology:

- Extends life of insulation component.
- Adheres insulation to belt to prevent hot gas from residing between the two components.
- Prevents insulation from falling into duct.
- Makes installation easier.
- Fabricated into all expansion joint shapes and sizes.
- **THERMALAM™ 12, 50, and 100** Technology can be used with all **TCI** materials.

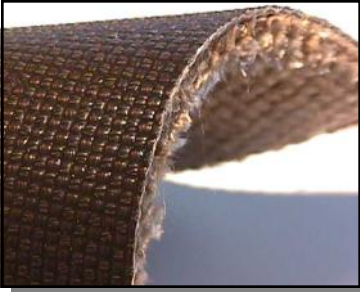

**THERMALAM™ 12**

Rugged, woven, 1/8" fiberglass that increases the upper temperature capability of all **TEXFILM™**, **TEX-LFP™**, and **LFP™** **CrossFilm™** Expansion Joint products.

Rated to 700°F (371°C)



**THERMALAM™ 50**

Laminated, nonwoven, 1/2" fiberglass mat that increases the upper temperature capability of all **TEXFILM™**, **TEX-LFP™**, and **LFP™** **CrossFilm™** Expansion Joint products.

Rated to 1000°F (538°C)



**THERMALAM™ 100**

Rugged, woven, 3/8" fiberglass that increases the upper temperature capability of all **TEXFILM™**, **TEX-LFP™**, and **LFP™** **CrossFilm™** Expansion Joint products.

Rated to 850°F (454°C)

**THERMALAM™**, **LFP™** **CrossFilm™**, **TEX-LFP™**, and **TEXFILM™** are trademarks of **TEXTILES COATED INTERNATIONAL**. Patented worldwide.  
 This information is supplied in good faith is based on information currently available. **TCI** makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.