



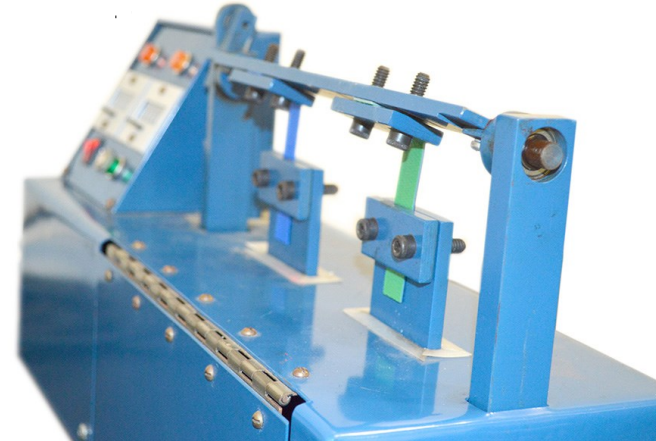

## CrossFilm™ Flex Test

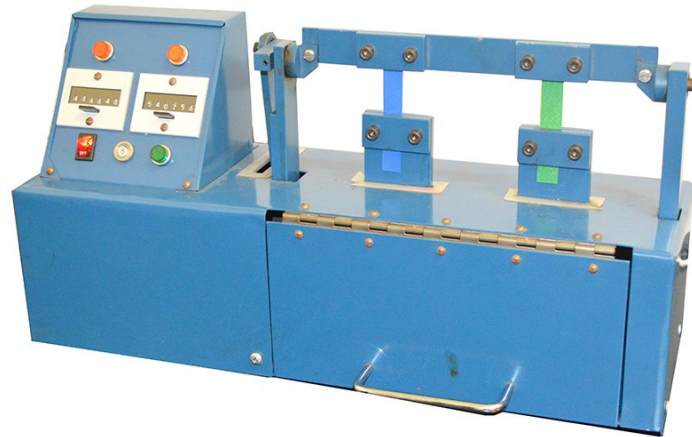

### CROSSFILM™ 2160 VS PTFE/FIBERGLASS COMPOSITE

PRODUCT	LOAD lbs/in (N/50mm)	<b>CYCLES TO FAILURE</b>	<b>Method of Failure</b>
PTFE/Fiberglass Composite	20 (175)	185,000	Complete fiberglass break
<b>CrossFilm™ 2160</b>	20 (175)	<b>3,200,000</b>	<b>Pinhole in CrossFilm™ detected by spark tester</b>

CrossFilm™ are trademarks of TEXTILES COATED INTERNATIONAL. Patents worldwide. This information is supplied in good faith is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.

TEXTILES COATED INTERNATIONAL | Manufacturer of High-Performance Fluoropolymer Films, Laminates, and Composites

200 Bouchard Street, Manchester, NH 03103 USA PHONE: (603) 296-2221 FAX: (603) 296-2248 [www.textilecoated.com](http://www.textilecoated.com)