




EJ™ 1650 Conductive Insulation Jacketing

PTFE/FIBERGLASS COMPOSITES ENGINEERED FOR REMOVABLE INSULATION SERVICE

EJ™ 1650 Conductive:

This PTFE/fiberglass composite is engineered for challenging insulation jacketing applications.

- **Successfully used in insulation jacketing service since 1985.**
- **Standard color black**
- **Severe chemical and temperature exposure capabilities**

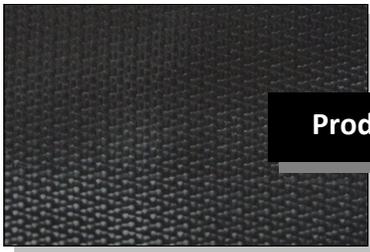

Product Close-up

- **Special coating technology for industrial fabrication**
- **Easily sewn**
- **Flame-resistant**

EJ™ 1650 PROPERTIES

Upper Use Temperature:	600°F (316°C) Continuous Service
Overall Weight:	16.5 oz/yd ² (560 g/m ²)
Thickness:	0.015 inches (0.38 mm)
Width:	60 inches (1524 mm) Nominal
Tensile Strength (Warp):	400 lbs/inch (3503 N/50 mm)
Tensile Strength (Fill):	300 lbs/inch (2627 N/50 mm)
Surface Resistivity:	< 300,000 ohms/sq

This material does not contain an illegal or detectable level of PFOA or PFOS in parts per trillion.

EJ™ is a trademark of TCI (Textiles Coated International). This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.

TEXTILES COATED INTERNATIONAL | Manufacturer of High-Performance Fluoropolymer Films, Laminates, and Composites

200 Bouchard Street, Manchester, NH 03103 USA PHONE: (603) 296-2221 FAX: (603) 296-2248 www.textilescoated.com