


FIBERGLASS-FREE PTFE BELTING MATERIAL FOR CONTACT GRILLING APPLICATIONS

CrossFilm™ 2103 Food Belting:

CrossFilm™ 2103 Food Belting is a 100% PTFE laminate designed for contact grilling applications. Since the material is 100% PTFE, it is guaranteed to be corrosion-free. By eliminating the concern for corrosion, CrossFilm™ Food Belting performance is reliable and predictable and costly and unplanned down-time from random belt failure is avoided. Unique multidirectional strength and stress crack resistance allow this flexible, 0.003" (0.08 mm) PTFE product to be a self-supporting material. Reinforcements like fiberglass, which are susceptible to chemical attack, are not needed. CrossFilm™ 2103 has tremendous flexing capability, easily outlasting fiberglass reinforced materials and other PTFE products in high flex applications.

- All-PTFE composition, complying with FDA Standard 21 CFR 177.1550 for food contact
- Does not contain fiberglass
- Edges will bend before breaking to handle improper tracking

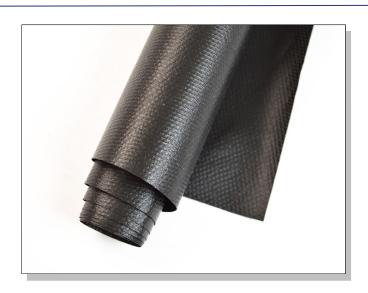

- Easily repairable
- Methods of attachment other than heat sealing can be used
- Upper temperature limit of 600°F (316°C)
- Compatible with any chemical environment
- Easy to clean and unaffected by cleaning chemicals

CROSSFILM™ 2103 PROPERTIES

Upper Use Temperature: 600°F (316°C) Continuous Service

Overall Weight: $5.2 \text{ oz/yd}^2 (176 \text{ g/m}^2)$

Thickness: 0.003 inches (0.08 mm)

Width: 60 inches (1524 mm), cut to size widths available

Tensile Strength: 20 lbs/inch (177 N/50 mm)

Tear Strength: 17 lbs (75.6 N)

CrossFilm™ is a trademark of TEXTILES COATED INCORPORATED. Patents worldwide This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.

TEXTILES COATED INTERNATIONAL | Manufacturer of High-Performance Fluoropolymer Films, Laminates, and Composites