



# THERMALAM™ 50/1005 Expansion Joint Material

SINGLE MEMBRANE PTFE/FIBERGLASS LAMINATED COMPOSITE ENGINEERED FOR HIGH-TEMPERATURE FLUE GAS SERVICE

## THERMALAM™ 50/1005 Expansion Joint Material:

THERMALAM™ 50/1005 is capable of performing in flue gas temperatures up to 1000°F (538°C).

A nonwoven fiberglass mat with a thickness of 1/2" (12 mm) is laminated to TEXFILM™ 1005, an exceptionally durable outer cover component because of its bonded 0.005 in (0.12 mm) thick CrossFilm™ gas seal barrier.


Because the insulation mat is mechanically bonded to the outer cover component, it acquires the tensile and tear strength properties of TEXFILM™ 1005. As a result, the service life of the high temperature THERMALAM™ material is significantly extended.

Also, the single membrane construction minimizes the formation of "hot spots" and greatly simplifies the installation of the expansion joint.

THERMALAM 50/1005 can be fabricated into numerous expansion joint shapes and sizes.



*This plot shows the capability of THERMALAM™ 50/1004 resting on a hot plate in a room temperature environment.*

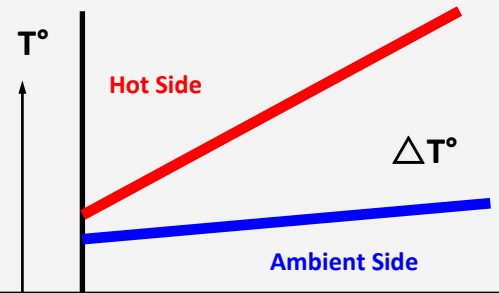

## THERMALAM™ 50/1005 PROPERTIES

<b>Upper Use Temperature:</b>	1000°F (538°C) Continuous Service
<b>Weight:</b>	111 oz/yd <sup>2</sup> (3774 g/m <sup>2</sup> )
<b>Thickness:</b>	1/2" (12 mm) nominal
<b>Width:</b>	59" (1498 mm); Special widths available
<b>Tensile Strength (Warp):</b>	1000 lbs/in (8756 N/50 mm)
<b>Tensile Strength (Fill):</b>	1000 lbs/in (8756 N/50 mm)

THERMALAM™ and TEXFILM™ are trademarks of TEXTILES COATED INCORPORATED. Patented worldwide. This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.

TEXTILES COATED INTERNATIONAL | Manufacturer of High-Performance Fluoropolymer Films, Laminates, and Composites

200 Bouchard Street, Manchester, NH 03103 USA PHONE: (603) 296-2221 FAX: (603) 296-2248 www.textilescoated.com